


mod. **CPZ** Beams horizontal lifting
without locking device

CPZ clamp is used for horizontal lifting of double flange beams, small girders and structural sections.

The clamp incorporates a spring type device that allows the clamp to hold in position the load until the lift starts.

Do ascertain the real centre of gravity to avoid beam sliding.

Remove clamp only after the load is completely supported and at rest in a permanent stable position.

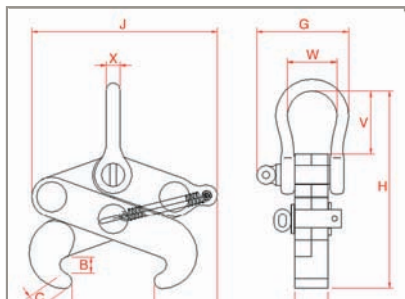

CODE	CAPACITY TON	A	B	C	D	F	G	H (min-max)		J	V	W	X	WEIGHT KG
		MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	
CPZ03000	3	80	16	20	68	36	98	212	285	200	68	54	13	6
CPZ05000	5	148	19	23	70	36	98	245	400	200	70	53	16	10